

**HIGH-SPEED MWIR  
SCIENCE-GRADE CAMERA**  
**FLIR X6800sc™**

The FLIR X6800sc is a fast, highly sensitive MWIR camera designed for scientists, researchers, and engineers. With advanced triggering and on-camera RAM/SSD recording, this camera offers the functionality to stop motion on high-speed events both in the lab and at the test range.

[www.flir.com/science](http://www.flir.com/science)

**HIGH SPEED, HIGH SENSITIVITY**

Record crisp thermal images, even at high speeds

- Capture full 640 x 512 pixel resolution data at 520 Hz
- Achieve frame rates up to 23,076 Hz in subwindow mode
- Detect temperature differences down to <20 mK with very low noise

**ON-CAMERA RAM/SSD  
RECORDING**




Stop motion on high-speed events, both in the lab and at the test range

- Save up to 51 seconds of full-resolution data to on-camera RAM with zero dropped frames
- Play back from RAM or save to removable solid-state drive in 90-seconds, so you can quickly rearm for a new recording
- Stream high-speed 14-bit data simultaneously over Gigabit Ethernet, and CameraLink

**SYNCHRONIZATION,  
TRIGGERING, AND SOFTWARE**

Capture every moment by synchronizing with external events or instrumentation

- Triggers with external BNC input, a software trigger, or an IRIG-B time stamp for maximum versatility
- Integrates seamlessly with FLIR ResearchIR Max or third-party software such as MathWorks® MATLAB
- Stream data directly to a PC running software for live viewing, recording, analysis, and sharing
- Integrate with your proprietary software through optional Software Developers Kit (SDK)

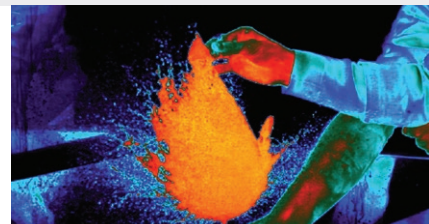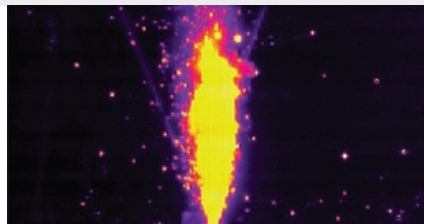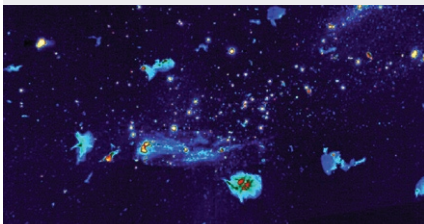

## SPECIFICATIONS

FLIR X6800sc MWIR	
Detector Type	FLIR indium antimonide (InSb)
Spectral Range	3.0 – 5.0 µm or 1.5 – 5.0 µm
Resolution	640 x 512
Detector Pitch	25 µm
Thermal Sensitivity/NETD	<20 mK
Well Capacity	11.0 M electrons
Operability	>99.8% (>99.95% typical)
Sensor Cooling	Closed cycle rotary

### Electronics

Readout Type	Snapshot
Readout Modes	Asynchronous integrate while read Asynchronous integrate then read
Synchronization Modes	Genlock, Sync-in, Sync-out
Image Time Stamp	Internal IRIG-B decoder clock TSPI accurate time stamp
Minimum Integration Time	270 ns
Pixel Clock	355 MHz
Frame Rate (Full Window)	Programmable; 0.0015 Hz to 520Hz
Subwindow Mode	Flexible windowing down to 32 x 4 (steps of 32 columns, 4 rows)
Dynamic Range	14-bit
On-Camera Image Storage	RAM (volatile): 16 GB, up to 26,000 frames, full frame, SSD (non-volatile): 512 GB (supports >4 TB)
Radiometric Data Streaming	Simultaneous Gigabit Ethernet (GigE Vision), Camera Link Full
Standard Video	HDMI, SDI, NTSC, PAL
Command and Control	GigE, USB, RS-232, Camera Link, CXP (GenICam protocol supported over GigE or CXP)

### Temperature Measurement

Standard Temperature Range	-20°C to 350°C (-4°F to 662°F)
Optional Temperature Range	Up to 3,000°C (5,432°F)
Accuracy	±1°C or ±1% of reading (0°C to 3,000°C on standard lens configurations only)

### Optics

Camera f/Number	f/2.5 or f/4.1
Available Lenses (Uses FLIR HDC Optics)	3-5 µm: 17 mm, 25 mm, 50 mm, 100 mm, 200 mm Broadband (1-5 µm): 25 mm, 50 mm, 100mm
Lens Interface	FLIR HDC (4-tab bayonet)
Focus	Manual
Filtering	Filter wheel, standard 1-inch filters

### Image/Video Presentation

Palettes	Selectable 8-bit
Automatic Gain Control	Manual, Linear, Plateau equalization, ROI, DDE
Overlay	Customizable (Timestamp, Date, Integration time, Internal temp, Frame rate, Sync mode, Cooler hours)
Video Modes	HD: 720p/50/59.9 Hz, 1080p/25/29.9 Hz
Digital Zoom	1x, 4x, 4:3

### General

Operating Temperature Range	-20°C to 50°C (-4°F to 122°F)
Shock/Vibration	40 g, 11 msec ½ sine pulse/4.3 g RMS random vibration, all 3 axes
Power	24 VDC (< 50 W steady state)
Weight w/Handle, w/o Lens	6.35 kg (14 lbs)
Size (L x W x H) w/o Lens, Handle	249 x 156 x 147 mm (9.8 x 6.2 x 5.8 in.)
Mounting	2 x ¼ in. -20 1 x 3/8 in. -16 4 x #10 -24 Side: 3x ¼ in. -20 (each side)

## ADVANCED FILTERING OPTIONS

The FLIR X6800sc incorporates an easy access, four-position motorized filter wheel that permits the user to change filters. With automatic filter recognition, the camera knows the filter location, spectral band, and associated calibrations, making it easy to select a filter and load a custom calibration and configuration to the camera.



**CORPORATE HEADQUARTERS**  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
PH: +1 877.773.3547

**SANTA BARBARA**  
FLIR Systems, Inc.  
6769 Hollister Ave.  
Goleta, CA 93117  
PH: +1 805.690.6600

**CANADA**  
FLIR Systems, Ltd.  
920 Sheldon Court  
Burlington, ON L7L 5K6  
Canada  
PH: +1 800.613.0507

**LATIN AMERICA**  
FLIR Systems Brasil  
Av. Antonio Bardella,  
320 Sorocaba, SP 18085-852  
Brasil  
PH: +55 15 3238 7080

**CHINA**  
FLIR Systems Co., Ltd  
Rm 1613-16, Tower II  
Grand Central Plaza  
138 Shatin Rural Committee Rd.  
Shatin, New Territories  
Hong Kong  
PH: +852 2792 8955955

**EUROPE**  
FLIR Systems, Inc.  
Luxemburgstraat 2  
2321 Meer  
Belgium  
PH: +32 (0) 3665 5100

www.flir.com  
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2018 FLIR Systems, Inc. All rights reserved. 04/23/18

17-1683-INS-x6800sc Datasheet



The World's Sixth Sense®