


HA1600A Power and Harmonics Analyser

High speed compliance quality measurements

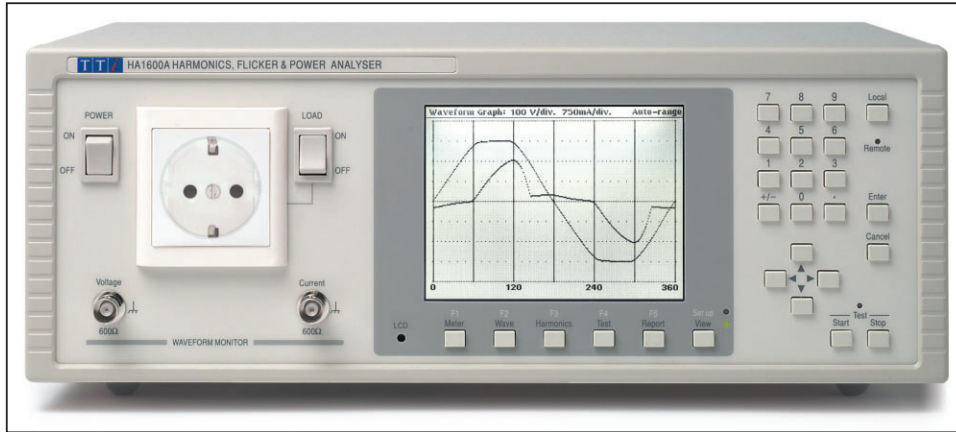

HA1600A

- ▶ Measures power, voltage, current, phase angle etc.
- ▶ Tabular and histogram display of harmonics
- ▶ Voltage and current waveform displays
- ▶ Continuous analysis with real-time graphical update
- ▶ Compliance quality measurements to EN61000-3-2/-3
- ▶ Wide range of national power connectors available
- ▶ Parallel printer and RS232 and USB interfaces
- ▶ PC control and documentation software supplied

AC1000A

- ▶ Provides an EN61000-3-2 compliant source
- ▶ 1000W power capability at 230V
- ▶ Up to 4.4A rms load current and up to 10A peak currents
- ▶ Comprehensive overload protection
- ▶ Connection via standard power connector

Overview

The **HA1600A** is a fast, easy to use mains and harmonics analyser with a large and high resolution graphical display, capable of continuous real-time analysis.

The HA1600A is intended primarily as a dedicated harmonics and flicker analyser for compliance quality measurements, but it can also be used as a general purpose mains analyser.

The unit is available with range of power connectors to suit different national standards.

A printer interface is included for record keeping and archiving, along with both RS-232 and USB interfaces for PC connectivity.

HA-PC Link Plus is Windows based software supplied with the HA1600A.

It is intended to assist users in taking routine compliance measurements and archiving the results.

It can communicate with the instrument through either an RS232 or a USB connection.

The **AC1000A** is an innovative, low cost, pure power source designed specifically for use with a harmonics analyser such as the TTI HA1600A.

It permits compliance quality measurements to EN61000-3-2 in situations where the quality of the AC supply is poor or variable.

High performance power analyser

The HA1600A is a high speed, high accuracy ac power analyser for single phase loads of up to 16 amps RMS.


Dual power cables allow the supply to the load to be independent of the supply to the instrument. The output to the load is via a front panel mounted 'standard' mains connector. A wide range of power connectors is available including most national types.

The HA1600A can measure Watts, VA, Volts rms, Volts peak, Amps rms, Amps peak, Crest factors, THD, Power factor, Frequency and Inrush current.

Power Meter				Hold
Supply Voltage				
229.8 V _{rms}	0.1% THD	Frequency	50.04 Hz	
325.1 V _{pk}	at 89.4°	Crest Factor	1.414	
Load Power				
47.64 W	64.03 VA	Power Factor	0.744	
Load Current				
278.6 mA _{rms}	49.9% THD	90.7% under Class D mask		
586.0 mA _{pk}	Phase 12.5°	Crest Factor	2.103	
Harmonic Summary				
Load detected Class A by waveform.				
Load passes Harmonic levels.				
Supply meets IEC requirements.				

The large display can show multiple parameters simultaneously as well as graphical representations of voltage and current waveforms.

Dual 16 bit Analog to Digital converters continuously sample both voltage and current and give a wide dynamic range. A fast Digital Signal Processor gives the performance needed for continuous real-time analysis of the data. Advanced algorithms yield accurate results, using extended precision or floating point arithmetic wherever necessary.

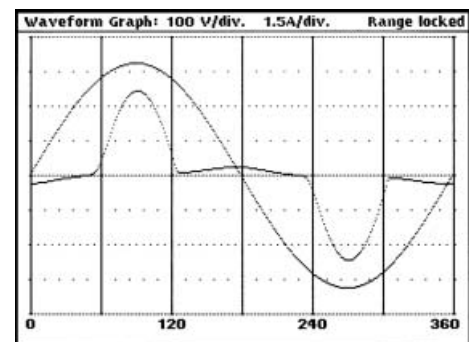

Voltage and current waveforms. The mains voltage purity has been restored using an AC1000A. Compare this with the uncorrected mains voltage shown in the instrument illustration.

Technical Specifications

MAINS ANALYSER

Measurement Circuit: Single Phase with standard mains connector.
Current Rating: 16A rms continuous, or national connector rating if lower.
Voltage Ranges: 115V ($\pm 200V$ pk) 230V ($\pm 400V$ pk).
Current Ranges: $\pm 24mA$ pk to $\pm 400A$ pk in fifteen 2:1 ranges.
Frequency Range: 43 - 67 Hz.
Shunt Resistance: $3m\Omega$.
Sampling Rate: 300 points per cycle.
Basic Accuracy: Better than 0.2% $\pm 1mA$, up to 16A.
Measured Parameters: V_{rms} , V_{pk} , A_{rms} , A_{pk} , Crest factors, THD, W, VA, Power factor, Frequency, Inrush current.
Display Modes:
Tabular display of all parameters including latest and highest inrush current. Waveform graph display of voltage and current with normal, max hold, accumulate and multiple cycle display.
Monitor Outputs: Re-constructed Voltage and Current Signals.

HARMONICS ANALYSER

Measurements: 1st harmonic to 40th harmonic.
Measurement processing for both 1995 and 2000 Editions of EN61000-3-2. Continuous calculation, analysis and assessment of unfiltered, filtered, average, minimum and maximum current harmonic levels and limits. Continuous measurement and assessment of supply waveform and harmonics.
Current Rating: 16A rms continuous, or national connector rating if lower.
Voltage Ranges: 115V ($\pm 200V$ pk) 230V ($\pm 400V$ pk).
Current Ranges: $\pm 24mA$ pk to $\pm 400A$ pk in fifteen 2:1 ranges.
Frequency Range: 43 - 67 Hz.
Shunt Resistance: $3m\Omega$.
Transforms Window: Continuous 4, 10, 12 or 16 cycle Discrete Fourier Transforms.
Basic Accuracy: Better than 5% of limit or 0.2% of selected range (whichever is the greater) $\pm 1mA$.
Display Modes:
Display of load supply assessment for voltage, harmonics, crest limits and frequency against requirements of EN61000-3-2.
Histogram or tabular display of supply voltage harmonics.
Histogram display of current harmonics with limits, Min. hold, Max. hold and percentage of limit display options.
Tabular display of current harmonics showing present values, limits, average values, average as percent of limit, maximum values, maximum as percent of limit and pass or fail assessment for each harmonic.
Test Control:
Untimed, manually timed or automatically timed tests; user-defined test time.
Limits automatically determined from EN61000-3-2 for appropriate class; Class C and Class D limits can be automatically calculated from power measurements or from ratings declared by the user. Minimum and maximum power thresholds for limits can be changed by the user.
Facility for declaring supply voltages other than 230V and deriving appropriate limits. Facility for inseting test limits.
Report Printing:
Direct printer connection for hard-copy report with user-entered narrative, supply voltage assessment and current harmonic analysis and assessment.

VOLTAGE FLUCTUATIONS & FLICKER METER

Measurements: Voltage fluctuations d_{max} , d_c , $d(t)$ and flicker P_{st} and P_{it} to EN61000-3-3 and EN61000-4-5.
Current Rating: 16A rms continuous, or national connector rating if lower.
Voltage Ranges: 115V ($\pm 200V$ pk) 230V ($\pm 400V$ pk).
Fluctuation Range: 25% max. (relative to nominal voltage)
Flickermeter Range: Voltage change up to 20% (sinewave change) or 10% (low repetition rate rectangular change) relative to AGC level. Equivalent to 6400 pu on 8.8 Hz sinewave.

Flickermeter AGC: Up to $\pm 5\%$.
Flickermeter Accuracy: Better than 5% for P_{st} range 0.7 to 10.0.
Frequency Range: 50 or 60 Hz (operates over 43 - 67 Hz).
Report Printing: Tabular listing of voltage variations, P_{st} classifier and P_{st} in each P_{it} interval.

GENERAL

Display: 320 x 240 pixel backlit LCD.
Clock: Realtime clock for time/date stamping of Report data.
Interfaces: Parallel Printer, RS-232, USB.
Instrument Supply: 230V or 115V $\pm 14\%$, 48 to 65Hz.
Operating Range: $+5^\circ C$ to $40^\circ C$, 20-80% RH.
Storage Range: $-10^\circ C$ to $+60^\circ C$.
Dimensions: 357 x 132 x 235mm (WxHxD)
Weight: 4.4 kg
Safety: Complies with EN61010-1
EMC Compliance: Complies with EN61326-1

HA-PC LINK PLUS SOFTWARE

HA-PC LINK PLUS is PC (Windows) software supplied with the HA1600A. It can communicate with the instrument through either an RS232 or a USB connection.
It is intended to assist users in taking routine compliance measurements and archiving the results.
The PC is used for configuration, display and data archiving only; all real time data handling and measurement processing continues to be performed by the Digital Signal Processor in the instrument. The performance of the PC does not affect the accuracy of the measurement results, and so there is no need for the either the PC or its software to be covered by a calibration certificate.

AC1000A LOW DISTORTION POWER SOURCE

Input Voltage: Factory built to 220V to 240V, 110V to 115V or 100V. Factory configure to 50Hz or 60Hz. Installation Category II.
Supply Tolerances: Voltage $\pm 10\%$. Frequency $\pm 1\%$
Output Voltage: Tracks the amplitude of the fundamental of the input voltage. A variable voltage input may be used to adjust the output voltage to within the limits specified by EN61000-3-2.
Output Distortion: Dependent on the purity of the input but will generally meet the requirements of EN61000-3-2.
Output Current: Maximum continuous output current is 4.4A (10A peak).
Output Power: Maximum output power is input voltage x 4.4 VA
Input Connection: IEC connector; front panel switch.
Output Connection: U.K., Schuko, or other national outlet sockets. Load power switch can be set to DIRECT or CORRECTED for 'A-B' comparisons.
Protection: Thermal trip automatically diverts load to a DIRECT connection in the event of thermal overload.
Operating Range: $+5^\circ C$ to $+35^\circ C$ at full rated output; 20% to 80% RH (non-condensing).
Storage Range: $-40^\circ C$ to $+70^\circ C$
Environmental: Indoor use at altitudes to 2000m, Pollution Degree 2.
Safety: Complies with EN61010-1
EMC: Complies with EN61326.
Size: 357 x 132 x 235mm (W x H x D)
Weight: 5.5 kg.

Thurlby Thandar Instruments Ltd. operates a policy of continuous development and reserves the right to alter specifications without prior notice.



S J ELECTRONICS
POWER • TEST & MEASUREMENT

0800 583 44 55

Tel: +44 1536 416 200

Fax: 0800 583 55 66

sales@sjelectronics.co.uk

www.sjelectronics.co.uk



S J ELECTRONICS
POWER • TEST & MEASUREMENT

0800 583 44 55

Tel: +44 1536 416 200

Fax: 0800 583 55 66

sales@sjelectronics.co.uk

www.sjelectronics.co.uk