

FLIR X8500sc


High-Speed, High Definition Thermal Cameras



The FLIR X8500sc is a highly sensitive, high-speed, high definition MWIR camera designed for scientists, researchers, and engineers. It has all the features needed for research and science: from on-camera RAM/SSD recording to a four-position motorized filter wheel. Plus, by combining HD resolution with high-speed frame rates, the X8500sc allows researchers to fully image the scene and stop motion on high-speed events – whether they're in the lab or on the test range.

High-Speed HD Recording

The X8500sc can record 180 frames per second at a full 1280 x 1024 pixel resolution, for true HD high-speed thermal imaging. Windowing allows for even faster frame rates, up to 29,134 Hz. Integration times down to 270 ns at full frame allow for stop-motion action on fast moving and ensure accurate measurements. The X8500sc records up to 36 seconds to on-camera RAM with zero dropped frames. Playback from RAM or save to the removable FLIR DVIR solid-state drive in just 90 seconds, and be ready to begin a new recording.

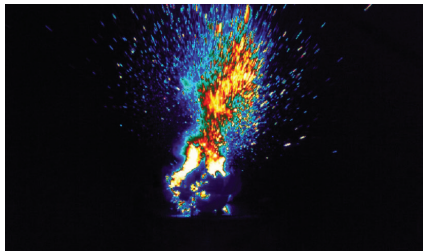


Synchronizes with events or external instruments

Advanced Spectral Filtering Options

The FLIR X8500sc incorporates an easy access, four-position motorized filter wheel that permits filter exchange in any environment. The camera automatically determines filter ID and corresponding calibrations. Add custom cold filters for more tailored spectral filtering requirements.

Streaming, Synchronizing, and Triggering


The X8500sc streams high-speed 14-bit data simultaneously over Gigabit Ethernet, Camera Link, and CoaXpress for live viewing, analysis, or recording. Trigger options such as the external BNC connector input make the X8500sc ideal for high-speed, high sensitivity applications. Sync In/Out allows for precisely coordinated image capture of each frame of data.

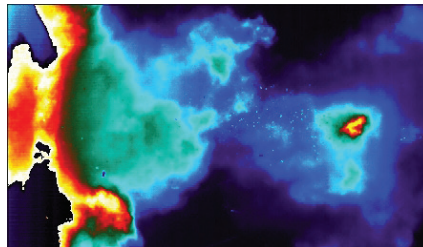

Measures temperatures up to 3000°C (optional calibration)

Software


The X8500sc camera works seamlessly with FLIR ResearchIR Max software, enabling intuitive viewing and recording, and advanced processing of the thermal data. The GigE Vision®/GenICam compliant Ethernet allows you to plug and play with ResearchIR or third-party software programs, such as Mathworks® MATLAB. An optional Software Developers Kit (SDK) is available, or use industry-standard GigE Vision toolkits.

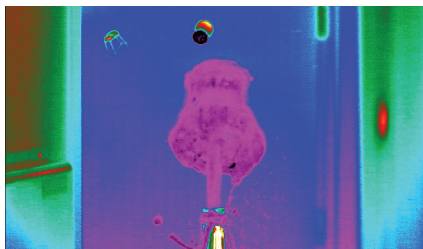

Fast frame rates and integration time needed to freeze action

Key Features

- 180 Hz, 1280 x 1024 resolution high-speed imaging
- Up to 36 seconds of on-camera RAM recording with FLIR DVIR
- Synchronization with other instruments and events
- Full GenICam support over GigE, CXP, and Camera Link interfaces
- Four-position motorized filter wheel with automatic filter recognition



Specifications

System Overview		X8500sc MWIR	
Detector Type	FLIR indium antimonide (InSb)		
Spectral Range	3.0 – 5.0 µm or 1.5 – 5.0 µm		
Resolution	1280 x 1024		
Detector Pitch	12 µm		
Thermal Sensitivity/NEΔT	< 20 mK*		
Well Capacity	3 M electrons/11.5 M electrons		
Operability	> 99.5% (> 99.95% typical)		
Sensor Cooling	Closed cycle linear		
Electronics/Imaging			
Readout	Snapshot		
Readout Modes	Asynchronous integrate while read Asynchronous integrate then read		
Synchronization Modes	Genlock, Sync-in, Sync-out		
Image Time Stamp	Internal IRIG-B decoder clock TSP1 accurate time stamp		
Minimum Integration Time	270 ns		
Pixel Clock	355 MHz		
Frame Rate (Full Window)	Programmable; 0.0015 Hz to 180 Hz		
Subwindow Mode	Flexible windowing down to 64 x 4 (steps of 32 columns, 4 rows)		
Dynamic Range	14-bit		
On-Camera Image Storage	RAM (volatile): 16 GB, up to 6500 frames, full frame SSD (non-volatile): >4 TB		
Radiometric Data Streaming	Simultaneous Gigabit Ethernet (GigE Vision®), Camera Link, CoaXPress (CXP)		
Standard Video	HDMI, SDI, NTSC, PAL		
Command and Control	GigE, RS-232, Camera Link, CXP (GenICam protocol supported over GigE, CXP, or Camera Link)		
Temperature Measurement			
Standard Temperature Range	-20°C to 350°C (-4°F to 662°F)		
Optional Temperature Range	Up to 3000°C (5,432°F)		
Accuracy	± 2°C or ± 2% of reading		
Optics			
Camera f/Number	f/2.5 or f/4		
Available Lenses (Uses FLIR HDC Optics)	3-5 µm: 17 mm, 25 mm, 50 mm, 100 mm, 200 mm Broadband (1.5-5 µm): 25 mm, 50 mm, 100 mm		
Close-up Lenses/ Microscopes	1x, 4x (3-5 µm, requires f/4.1 camera)		
Lens Interface	FLIR HDC (4-tab bayonet)		
Focus	Manual		
Filtering	Filter wheel, standard 1-inch filters (2 filters/wheel position)		
Image/Video Presentation			
Palettes	Selectable 8-bit		
Automatic Gain Control	Manual, Linear, Plateau equalization, ROI, DDE		
Overlay	Customizable (IRIG-B, Date, Integration time, Internal temp, Frame rate, Sync mode, Cooler hours)		
Video Modes	HDMI/HD-SDI: 720p/25/29.9/50/59.9 Hz, 1080p/25/29.9 Hz Composite: NTSC, PAL		
Digital Zoom	1x, 4x, 4:3		
General			
Operating Temperature Range	-20°C to 50°C (-4°F to 122°F)		
Shock / Vibration	40 g, 11 msec ½ sine pulse/4.3 g RMS random vibration all 3 axes		
Weight w/Handle, w/o Lens	6.35 kg (14 lbs)		
Size (L x W x H) w/o Lens, Handle	249 x 158 x 147 mm (9.8 x 6.2 x 5.8 in.)		
Mounting	2 x 1/4-20 tapped holes 1 x 3/8-16 taped holes 4 x 10-24 tapped holes Side: 3x 1/4-20 tapped holes		

* NEΔT is measured at 50% well-fill, using a 25°C scene

Specifications are subject to change without notice.

For the most up-to-date specifications, go to www.flir.com



PORTLAND
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070 USA
PH: +1 866.477.3687

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063 USA
PH: +1 866.477.3687

EUROPE
FLIR Systems
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

CANADA
FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5K6
Canada
PH: +1 800.613.0507

CHINA
FLIR Systems Co., Ltd
Rm 1613-16, Tower II
Grand Central Plaza
138 Shatin Rural
Committee Road Shatin
New Territories
Hong Kong
PH: +852 2792 895

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 7080

www.flir.com/science
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. (Updated Jan 24) 17-0106